



## Complete shaft assemblies NA



To be used in conjunction with Suhner flexible shaft motors.  
 Assembly includes core with couplings, neoprene casing with couplings and reinforcement boots.

**Direction of rotation**  
 Right-hand, clockwise.

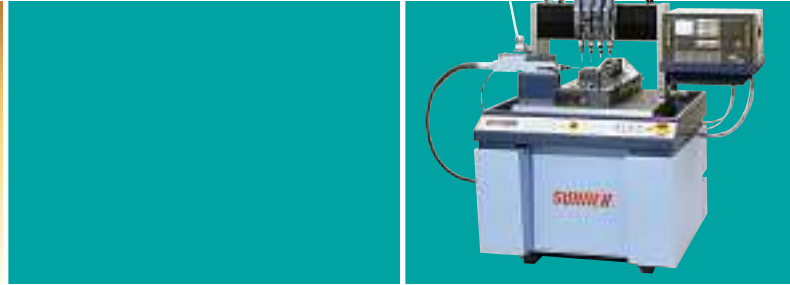

Type	Connection details Page 40, 41		Shaft $\varnothing$ / Length	Max. rpm	Weight	Shaft with coupling only	Casing with coupling only
	Motor side	Tool side					
			[mm]	[mm <sup>-1</sup> ]	[kg]	[kg]	[kg]
NA 4 × 1250	G 28	G 16	4 x 1250	40 000	0.500	0.120	0.330
NA 4 × 1250	DIN 10	G 16	4 x 1250	40 000	0.450	0.120	0.330
NA 7 × 1500	G 28	G 22	7 x 1500	20 000	1.250	0.400	0.850
NA 7 × 1500	DIN 10	G 22	7 x 1500	20 000	1.250	0.400	0.850
NA 7 × 2000	DIN 10	G 22	7 x 2000	25 000	1.700	0.600	1.100
NA 10 × 1500	G 28	G 28	10 x 1500	15 000	2.100	0.700	1.400
NA 10 × 1500	DIN 10	G 28	10 x 1500	15 000	2.050	0.650	1.400
NA 10 × 1500	DIN 15	G 28	10 x 1500	15 000	2.100	0.700	1.400
NA 10 × 2000	G 28	G 28	10 x 2000	15 000	2.500	0.950	1.550
NA 10 × 2000	DIN 10	G 28	10 x 2000	15 000	2.500	0.950	1.550
NA 10 × 2000	DIN 15	G 28	10 x 2000	15 000	2.500	0.950	1.550
NA 12 × 2000	G 28	G 28	12 x 2000	12 000	3.850	1.300	2.550
NA 12 × 2000	DIN 10	G 28	12 x 2000	12 000	3.750	1.300	2.450
NA 12 × 2000	DIN 10	G 35	12 x 2000	12 000	3.750	1.300	2.450
NA 12 × 2000	DIN 15	G 28	12 x 2000	12 000	3.800	1.300	2.500
NA 12 × 2000	DIN 15	G 35	12 x 2000	12 000	3.850	1.350	2.500
NA 12 × 2500	DIN 10	G 28	12 x 2500	12 000	4.000	1.600	2.900
NA 15 × 2000	DIN 15	G 35	15 x 2000	8000	5.250	2.000	3.750
NA 20 × 2500	DIN 15	G 35	20 x 2500	5000	9.450	4.000	5.450