



SU-Flex shafts

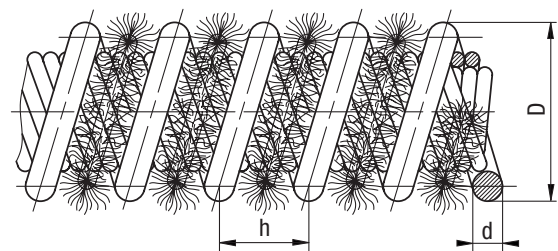

SU-Flex flexible helix shafts are especially suitable for linear movements, such as window lifting and sliding sunroof mechanisms in cars, as well as many other industrial applications.

The flocked versions are designed for applications in which noise is of critical importance.

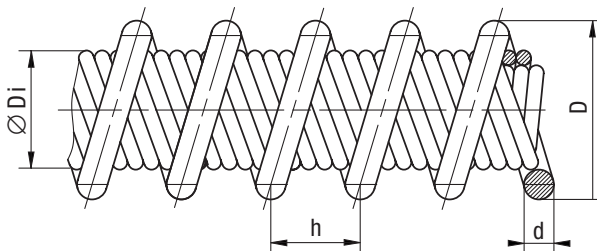

Type	Outer diameter D inch (mm)	Core diameter Di inch (mm)	Medium diameter Dm inch (mm)	Spiral wire diameter d inch (mm)	Helix pitch h inch (mm)	Minimum bending radius inch (mm)
GLR 120	0.119	0.063	0.088	0.031	0.079	4
GLL 120	(3.023)	(1.600)	(2.235)	(0.800)	(2.000)	(100)
GLR 150	0.150	0.095	0.119	0.031	0.092	4
GLL 150	(3.810)	(2.413)	(3.023)	(0.800)	(2.250)	(100)
GLR 187	0.187	0.103	0.142	0.045	0.110	4
GLL 187	(4.750)	(2.616)	(3.610)	(1.150)	(2.800)	(100)
GLR 250	0.258	0.144	0.195	0.063	0.143	5
GLL 250	(6.553)	(3.658)	(4.950)	(1.600)	(3.630)	(127)

Note: Other sizes, dimensions and constructions will be supplied if quantities justify. Please contact our engineering department for details.